

1-B6782-170

Retractable Cable, Coiled, Length 30m

General

Retractable cables are designed to provide electrical connection for parts that are in motion after connection e.g. a tank roof top of floating roof tanks. They reduce the risk present in normal cables of being caught and snapped during the rising and falling movement of the tank roof.

Accessories

For ease of installation, retracable cables may be used with an optional retractable cable collector, the 1-B6782-032.



Details


- Symplifies electrical connections of floating roof tanks
- Reduces cable damage in moving installations

1-B6782-170

Retractable Cable, Coiled, Length 30m

Technical specifications

Physical	
Physical dimensions	0.75 mm ²
Colour	Blue
Environmental	
Environment	Indoor, Outdoor
Cores	
Number	4
Colours	Blue, brown, black, yellow
Size	0.75 mm²
Diameter	1.75 mm
Insulation	PVC
Sheath	Polyurethane
Cable	
Colour	Black
Diameter	10 mm (± 0.25)
Sheath	Hytrel™ (Dupont)
Tails D/E*	1.5 m (± 50) 5.5m (± 100)
Working length (incl. tails)	30 m
Temperature	-40°C to +80°C
Coil	
Outer diameter (nom.) A*	250 mm
Closed length B*	580 mm (± 50)
Manufacturing standards	
Cores	ISO 6722 Thin Wall
*	

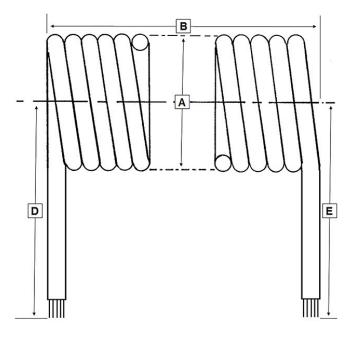



(See image below)

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.