

Long Throw LTN Nozzles

Features

- ✓ High performance and reliability
- ✓ Waterjet or Spray pattern
- ✓ Four models available

The Angus Long Throw Nozzles (LTN) have been designed for a wide range of applications, requiring a waterjet or spray pattern.

Whether for extinguishing fires, cooling duties including storage tanks and process areas, other hot metal surfaces, or providing protection against radiant heat, the LTN Nozzles will provide reliable and effective protection.

This nozzle range can also provide a non-aspirated foam spray, when used with film forming foams. Rapid knockdown of flammable liquid spill fires can then be provided.

These Gunmetal nozzles are particularly suited for use in coastal and offshore marine environments.

Four models are available at flows of 900, 1800, 2700 and 3300 litres/minute at 7 bar g inlet pressure.

Each nozzle provides a constant flow rate at a given pressure from jet through adjustment to wide angle spray.


This constant flow ensures that rapid changes of mode produce no detrimental effects on supply pumps, operating personnel or other equipment sharing the same water supply.

These LTN nozzles offer high performance and reliability. They are ideally suited for use with the Angus Streamline Monitors from the HM-80 hand monitor to the OM-80 entirely water powered oscillating monitor.

Operation

LTN Nozzles are of the ring orifice type, adjustable between jet and wide angle spray by a single 360° turn of the diffuser head. Synthetic rubber seals are fitted to prevent ingress of water, dust and other contaminants to the helical adjustment groove.

A specially designed double row diffuser produces a fine spray, ideal for cooling and film forming foam applications. Problems with metal teeth type diffusers have been eliminated by the use of rugged polyurethane for the combined buffer and diffuser head.

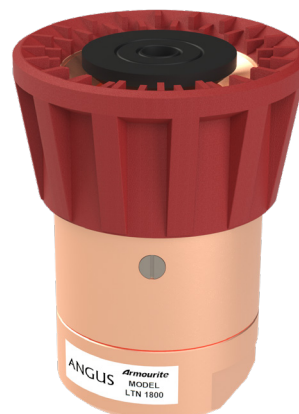

LTN 900 Nozzles



LTN 1800 Nozzles





LTN 3300 Nozzles



LTN 2700 Nozzles



EMERGENCY FOAM SERVICE
Call +44 (0) 15242 61166

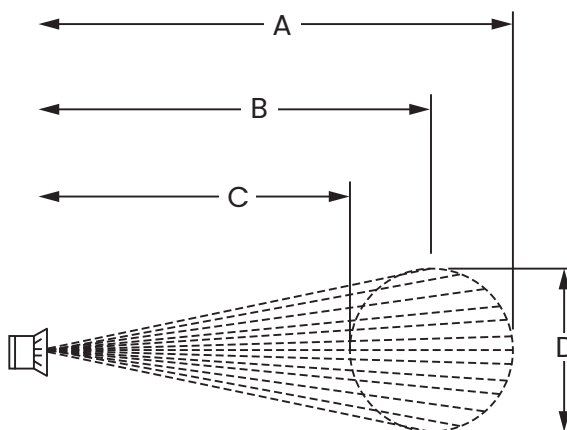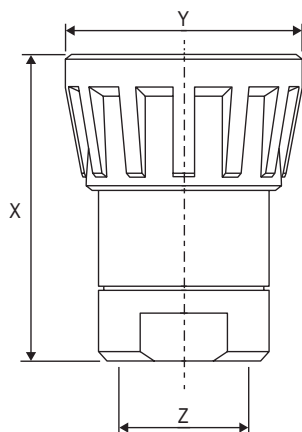

Nominal dimensions

LTN Model	900	1800	2700	3300
"X" Length (minimum)	172 mm	172 mm	172 mm	172 mm
"Y" Diameter	110 mm	136 mm	136 mm	136 mm
"Z" Inlet connection (BSP Female)	2"	2½"	2½"	2½"
Approx. Weight (Gunmetal)	4.0kg	6.4kg	6.4kg	6.4kg

Typical Performance Data

LTN Nozzle	Inlet Pressure (bar g)	Nominal Flow (litres/min)	JET	Typical THROW** (metres)							
				10° Spray				30° Spray			
				A	B	C	D	A	B	C	D
LTN 900	5	760	35	21	19	16	4	13	11	8	7
	7	900	50	29	27	23	5	18	15	11	8
	10	1080	56	32	30	26	6	20	17	12	9
	15	1300	62	36	34	32	6	22	19	14	10
LTN 1800	5	1520	47	24	22	18	4	16	13	10	7
	7	1800	50	34	31	26	5	23	18	14	10
	10	2150	55	38	35	29	6	26	20	16	11
	15	2635	60	42	39	33	7	29	23	18	12
LTN 2700	5	2280	50	24	22	18	4	16	13	10	7
	7	2700	60	34	31	26	5	23	18	14	10
	10	3227	65	38	35	29	6	26	20	16	11
	15	3950	68	42	39	33	7	29	23	18	12
LTN 3300	5	2790	48	24	22	18	4	16	13	10	7
	7	3300	55	34	31	26	5	23	18	14	10
	10	3944	60	38	35	29	6	26	20	16	11
	15	-	-	42	39	33	7	29	23	18	12

* Also available with 2 ½" Inst. Male coupling (BS336).

** Assumes 2m/sec following air movement



EMERGENCY FOAM SERVICE
Call +44 (0) 15242 61166



Specification

LTN Model	900	1800	2700	3300
Nominal flow at 7 bar g. ($\pm 5\%$)	900L/min	1800L/min	2700L/min	3300L/min
K factor***	340	680	1020	1247
Minimum working pressure	4 bar g			
Maximum working pressure	16 bar g			
Maximum spray angle	90° (nominal)			

*** Flow (litre/min) = $K \sqrt{P}$ where P = inlet pressure in bar.g.

Material specification

Body sections	Gunmetal LG2 high strength machined castings
Diffuser sleeve	Polyurethane cast and bonded to front section
Spray deflector	High strength acetal polymer
Seals	Synthetic rubber
Fasteners	Stainless steel

Angus Fire operates a continuous programme of product development. The right is therefore reserved to modify any specification without prior notice and Angus Fire should be contacted to ensure that the current issues of all technical data sheets are used.