

ACA-BL05-025

LHD Cable Accessory - Bracket "L", 50mm (2") (Zintec) w/ Sleeve - Qty25


L-Bracket

The ACA-BL series L-brackets is designed to support linear heat cable above the risk area e.g. the top run of a cable tray. A silicon protection sleeve is supplied with the unit to protect the sensor cable when fastened to the bracket.

Installation

The ACA-BL may be fitted to the cable tray and secured in place using a suitable bolt and nut at one end. The hole at the other end of the bracket allows for the securing of the sensor cable using a silicone sleeve and cable tie. The L-bracket allows support for the sensor cable at the selected distance away from the detection area.

Recommended spacing: 1m

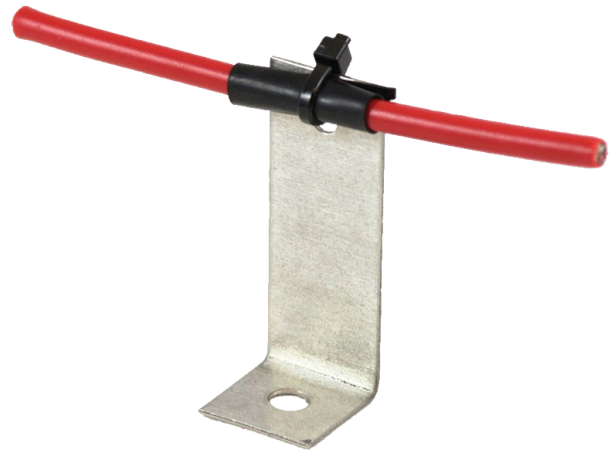

Details

- Easy installation of linear heat cable
- For use on cable trays
- Available in zintec
- Available in quantities of 25

ACA-BL05-025

LHD Cable Accessory - Bracket "L", 50mm (2") (Zintec) w/ Sleeve - Qty25

Technical specifications

Physical

Physical dimensions	20 x 50 mm (W x L)
Net weight	400 g
Material (body)	Stainless steel

Environmental

Environment	Indoor, Outdoor
-------------	-----------------

- ACA-BL05-025

Dimensions (l x w)	50 x 20mm
Weight	400g
Material	Zintec
Quantity	25

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 12 November 2020 - 16:15

